


EASYLIFE

NANEO S

WALL-HUNG GAS CONDENSING BOILER
CONDENSING PERFECTION,
PURE PERFORMANCE

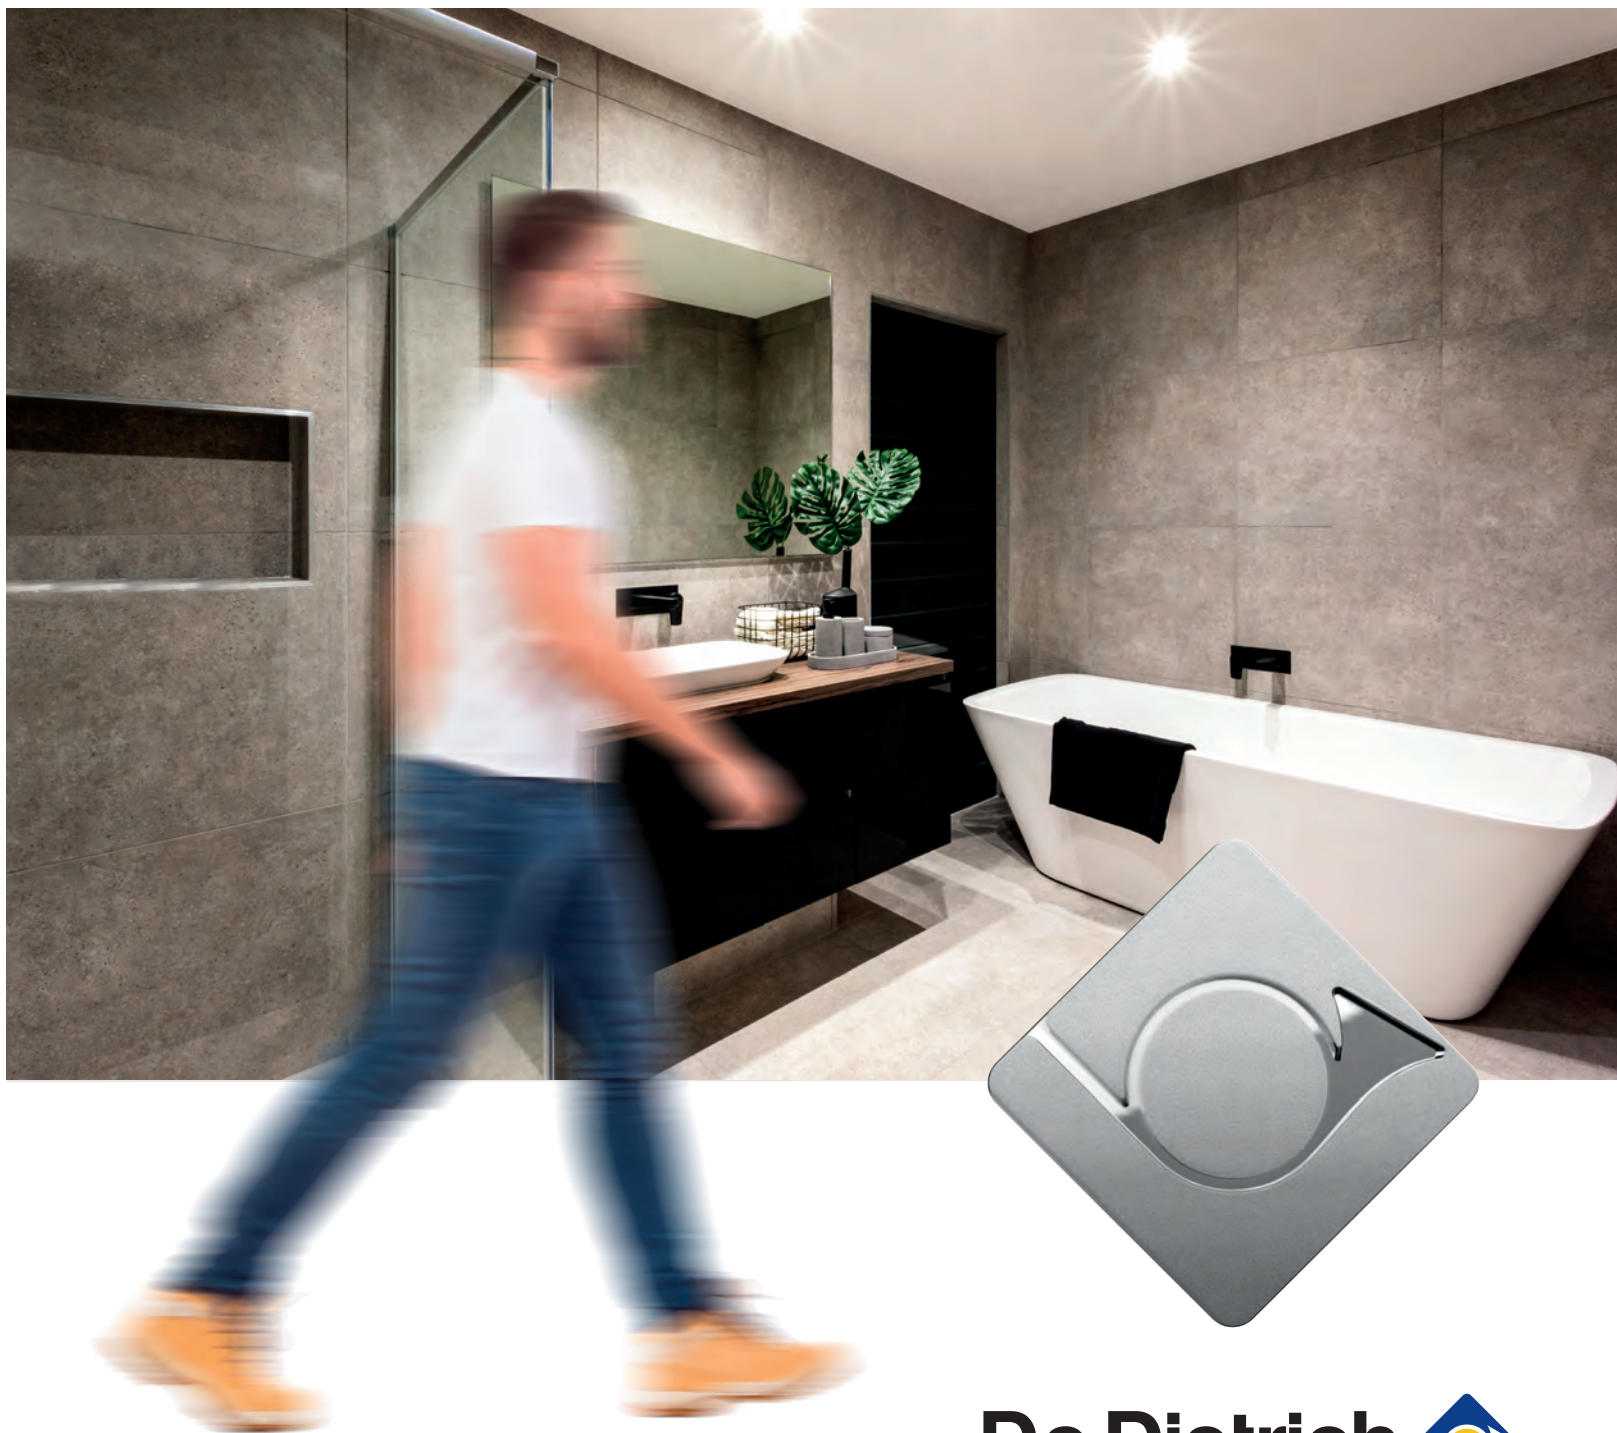

www.dedietrich-heating.com

De Dietrich 
SUSTAINABLE COMFORT®

CUT TO THE CHASE
FOR GREAT SAVINGS WITH NANEQ



Energy savings
of up to

30 %*

Hot water
on demand up to

210L

in 10 min.**

High efficiency up to

110%

*Compared to a previous generation boiler over 20 years old without a control system.

**For EMC-S 34/BS 130 (at $\Delta t = 30K$)

ECONOMICAL AND EFFICIENT, THE NANEO SOLUTION

- 110 %** High efficiency up to 110 %
- GAS** Energy savings of up to 30 %
Modulating burner output from 24 to 100 %
- High energy efficiency modulating pump for optimised electricity consumption
- Ultra-responsive heating body**



ENJOY MAXIMUM HOT WATER COMFORT

Available in two versions domestic hot water production


- Key icon:** A micro-accumulation version with a flow rate of up to 18.9 litres per minute* for responsive operation
- Water tap icon:** A version with an 80 or 130 litre tank and a flow rate up to 21 litres per minute** for maximum comfort
- Water drop icon:** Tank with magnesium anode protecting against corrosion for a longer service life
- Refresh icon:** Internal tank coating in enamel with high quartz content to guarantee consistently pure water

* for EMC-S 34/39 MI
** for EMC-S 34/BS 130

INSTALLATION AND MAINTENANCE: COULDN'T BE EASIER


COMPACT FOR EASY INSTALLATION SUITED TO ANY CONFIGURATION

- Compact icon:** compact
- Silent icon:** silent
- Lightweight icon:** lightweight

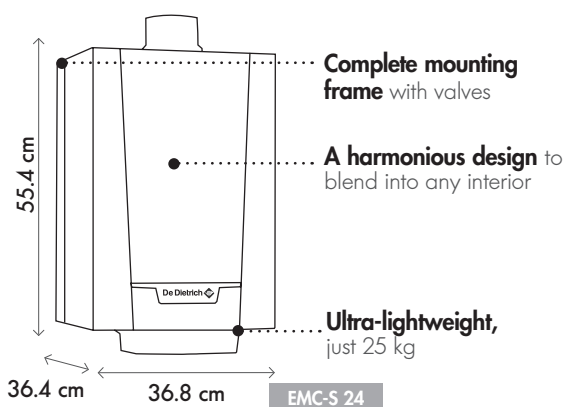


MODELS


Heating only



Heating + domestic hot water




Micro-accumulation



Tank on left or right

80 L



Tank under the boiler



130 L



STAY IN CONTROL WHEREVER YOU ARE, ANY TIME

with an **optional** modulating room thermostat

- Eco design performance with the outdoor temperature sensor and the Smart TC° connected room thermostat.

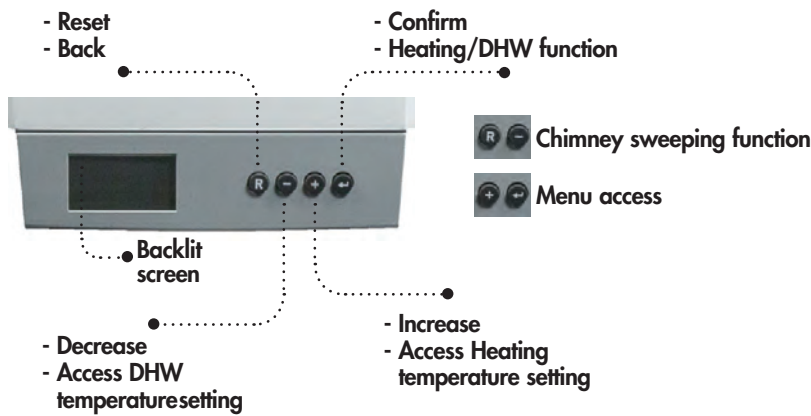

SIMPLE, REMOVABLE CONTROL PANEL

- Removable panel that can be positioned under the boiler or on the wall
- Control panel with screen and 4 settings buttons
- Setting the parameters and displaying the error codes



SMART TC° CONNECTED MODULATING THERMOSTAT

- Used to control the boiler remotely for heating and domestic hot water via a free app
- Intuitive to set up and very easy to use
- Advanced options allowing the installer to access the installation remotely**
- Failure and consumption alerts

** with customer's agreement



ROBUSTNESS AND COMFORT

BRASS

Brass hydraulic **body** on the frame for a long service life

ACTIVE REFILL


Active Refill Technology: an optional automatic water filling system for guaranteed comfort and safety.

Three setting options are available for filling with water to guarantee optimal pressure in the heating circuit:

Manual: the automatic system is deactivated and filling is performed manually

Semi-automatic: water filling can be performed directly via the boiler's control system or remotely via the application and the SMART TC° connected room thermostat

Automatic: fully automatic with no external intervention required.



TAILORED TO YOUR NEEDS EVEN EASIER TO USE

« A great price for high performances, perfect for my heating »

« Practical and compact, the Naneo-S can be installed anywhere in my home »

« Instant comfort for peace of mind »

ECO
SOLUTIONS

Eco-conception by De Dietrich



De Dietrich ECO-SOLUTIONS give you the latest generation of multi-energy products and systems: simpler, more efficient and more economical to guarantee your comfort and protect the environment.

The energy label associated with the ECO-SOLUTIONS label indicates the product performance.

www.ecodesign.dedietrich-heating.com

YOUR HEATING PROJECT



H 55.4 cm
W 36.8 cm
D 36.4 cm
25 to 28 kg



H 55.4 cm
W 36.8 cm
D 36.4 cm
Tank:
H 88 cm
ø 42.7 cm



H 55.4 cm
W 36.8 cm
D 36.4 cm
Tank:
H 91.2 cm
ø 57 cm

PERFORMANCE
heating
and hot water*



EMC-S 24

A+

EMC-S 34

A+

EMC-S
24/28 MI

A+ A

EMC-S
30/35 MI

A+ A

EMC-S
34/39 MI

A+ A

EMC-S
24/BS 80

A+ A

EMC-S
34/BS 80

A+ A

EMC-S
24/BS 130

A+ A

EMC-S
34/BS 130

A+ A

TYPE OF HOME
(apartment and home)



FUNCTIONS

Heating only



Heating + hot water
with micro-accumulation



Heating + hot water
with accumulation



**DOMESTIC HOT WATER
USE**



HEATING OUTPUT

24.8 kW

35.7 kW

24.8 kW

31.0 kW

35.7 kW

24.8 kW

35.7 kW

24.8 kW

35.7 kW

**DOMESTIC
HOT WATER OUTPUT**



27.5 kW

33.9 kW

37.8 kW

20.6 kW

22.1 kW

22.5 kW

24.0 kW

**NATURAL GAS
& PROPANE**



OPTIONS

Smart TC° connected room thermostat, modulating or non-modulating room thermostat, wired or radio-controlled, programmable or non-programmable, outdoor temperature sensor.

*With the following equipment: Outdoor temperature sensor + modulating or connected room thermostat. Without this equipment, the heating performance is A

A SYMBOL OF FRENCH QUALITY

For three hundred years, De Dietrich's success has been an expectation based on true values: quality, reliability, durability. In the interest of the environment and your comfort, De Dietrich perfectly manages various renewable energies using multi-energy systems to protect the planet. Thanks to the collaboration of our entire team, De Dietrich heating systems have been leading the way in innovation and offering optimal quality and rare longevity for 333 years.

Your installer

De Dietrich 

BDR THERMEA France
S.A.S. with corporate capital of €229 288 696
57, rue de la Gare F-67580 Mertzwiller
Tel. +33 3 88 80 27 00 - Fax +33 3 88 80 27 99
www.dedietrich-heating.com

BDR THERMEA GROUP

PEFC 10-31-1620 / Certifié PEFC / Ce produit est issu de forêts gérées durablement et de sources contrôlées. / pefc-france.org

IMPRIM'VERT® To protect the environment, this document is printed using vegetable-based ink.

Ref. 300034126 - 08/2019. Non-contractual photos. Photo credits: Shutterstock